


new
ranges




quickchange

abrasive products



type R




type S

Garryson quickchange range of abrasive products offers convenience, versatility and high performance for a wide range of applications from deburring and weld removal, to blending of machining marks and finishing. The range features Garryson's unique mini-flexidisc™ for conformability in small area blending applications, and minidisc for extra long life.


Available in a wide range of grits, diameters and two locking types, our range provides the quickchange solutions for improved productivity and quality at competitive prices

quickchange discs



aluminium oxide discs / 2 ply laminated


type R / male



Part Nr	Part Nr										max r.p.m.		
	24	36	40	50	60	80	120	180	240				
25mm	QA25036-R	QA25040-R	QA25050-R	QA25060-R	QA25080-R	QA25120-R					40,000	QR025	100
38mm	QA38036-R	QA38040-R	QA38050-R	QA38060-R	QA38080-R	QA38120-R					30,000	QR038	100
50mm	QA50024-R	QA50036-R	QA50040-R	QA50050-R	QA50060-R	QA50080-R	QA50120-R	QA50180-R	QA50240-R		30,000	QR050	100
75mm	QA75024-R	QA75036-R	QA75040-R	QA75050-R	QA75060-R	QA75080-R	QA75120-R	QA75180-R	QA75240-R		20,000	QR075	50

aluminium oxide / 2 ply laminated

type S / female




Part Nr	Part Nr										max r.p.m.		
	24	36	40	50	60	80	120	180	240				
25mm	QA25036-S	QA25040-S	QA25050-S	QA25060-S	QA25080-S	QA25120-S	QA25180-S	QA25240-S			40,000	QS025	100
38mm	QA38036-S	QA38040-S	QA38050-S	QA38060-S	QA38080-S	QA38120-S	QA38180-S	QA38240-S			30,000	QS038	100
50mm	QA50024-S	QA50036-S	QA50040-S	QA50050-S	QA50060-S	QA50080-S	QA50120-S	QA50180-S	QA50240-S		30,000	QS050	100
75mm	QA75024-S	QA75036-S	QA75040-S	QA75050-S	QA75060-S	QA75080-S	QA75120-S	QA75180-S	QA75240-S		20,000	QS075	50

ideal for

Most ferrous and non-ferrous metals

General purpose grinding, deburring and blending. Excellent edge durability



zirconium discs with grinding aid / 2 ply laminated

type R / male



Part Nr	Part Nr					max r.p.m.		
	36	40	50	60	80			
50mm	QZ50036-R	QZ50040-R	QZ50050-R	QZ50060-R	QZ50080-R	30,000	QR050	100
75mm	QZ75036-R	QZ75040-R	QZ75050-R	QZ75060-R	QZ75080-R	20,000	QR075	50

zirconium discs with grinding aid / 2 ply laminated

type S / female



Part Nr	Part Nr					max r.p.m.		
	36	40	50	60	80			
50mm	QZ50036-S	QZ50040-S	QZ50050-S	QZ50060-S	QZ50080-S	30,000	QS050	100
75mm	QZ75036-S	QZ75040-S	QZ75050-S	QZ75060-S	QZ75080-S	20,000	QS075	50

ideal for

Ideal for stainless steel, titanium, high temperature alloys, exotic alloys


Reducing heat generation during grinding, cool running

Rapid metal removal at medium to high applied pressure




ceramic discs / 2 ply laminated

type R / male



50mm 75mm	Part Nr				max r.p.m.		
	36	40	50	60			
50mm	QC50036-R	QC50040-R	QC50050-R	QC50060-R	30,000	QR050	100
75mm	QC75036-R	QC75040-R	QC75050-R	QC75060-R	20,000	QR075	50

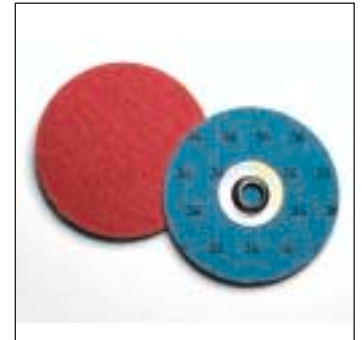

ceramic discs / 2 ply laminated

type S / female




50mm 75mm	Part Nr				max r.p.m.		
	36	40	50	60			
50mm	QC50036-S	QC50040-S	QC50050-S	QC50060-S	30,000	QS050	100
75mm	QC75036-S	QC75040-S	QC75050-S	QC75060-S	20,000	QS075	50

ideal for


Ideal for Stainless Steel, High Nickel Alloys and all heat sensitive metals
Rapid metal removal with high pressure applied. Exceptional edge durability

mx reinforced cotton fibre

type R / male



25mm 50mm 75mm	grits	Part Nr	max r.p.m.		
	Körnungen / grains / grano				
25mm	A24 M	MXQC4000	40,000	QR025	10
25mm	A36 F	MXQC4001	40,000	QR025	10
25mm	A54 F	MXQC4002	40,000	QR025	10
25mm	A80 F	MXQC4003	40,000	QR025	10
50mm	A24 M	MXQC4004	30,000	QR050	10
50mm	A36 F	MXQC4005	30,000	QR050	10
50mm	A54 F	MXQC4006	30,000	QR050	10
50mm	A80 F	MXQC4007	30,000	QR050	10
75mm	A24 M	MXQC4008	20,000	QR075	10
75mm	A36 F	MXQC4009	20,000	QR075	10
75mm	A54 F	MXQC4010	20,000	QR075	10
75mm	A80 F	MXQC4011	20,000	QR075	10

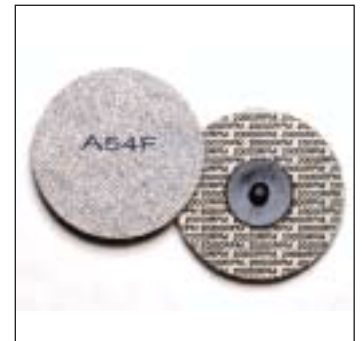

ideal for


Ideal for removing small welds, blending machine tool marks, deburring, breaking edges and finishing
Non smearing on Titanium and Stainless Steel



quickchange discs

garryflex® surface conditioning discs

type R / male



Disc Size	Part Nr				max rpm	Tool	Box Qty
	coarse	medium	fine				
50mm	QSC50C-R	QSC50M-R	QSC50F-R		30,000	QR050	50
75mm	QSC75C-R	QSC75M-R	QSC75F-R		20,000	QR075	25
100mm	QSC100C-R	QSC100M-R	QSC100F-R		12,000	QR100	25



garryflex® surface conditioning discs

type S / female



Disc Size	Part Nr				max rpm	Tool	Box Qty
	coarse	medium	fine				
50mm	QSC50C-S	QSC50M-S	QSC50F-S		30,000	QS050	50
75mm	QSC75C-S	QSC75M-S	QSC75F-S		20,000	QS075	25
100mm	QSC100C-S	QSC100M-S	QSC100F-S		12,000	QS100	25


ideal for

For use on all metals

Ideal for removing surface defects, blending machining marks, removal of heavy oxidation, removing weld splatter, and cleaning

garryflex® blend & finish discs

type R / male




Disc Size	Part Nr					max rpm	Tool	Box Qty
	coarse	medium	fine	v. fine				
50mm	QB50C-R	QB50M-R	QB50F-R	QB50VF-R		30,000	QR050	50
75mm	QB75C-R	QB75M-R	QB75F-R	QB75VF-R		20,000	QR075	25
100mm	QB100C-R	QB100M-R	QB100F-R	QB100VF-R		12,000	QR100	25



garryflex® blend & finish discs

type S / female



Disc Size	Part Nr					max rpm	Tool	Box Qty
	coarse	medium	fine	v. fine				
50mm	QB50C-S	QB50M-S	QB50F-S	QB50VF-S		30,000	QS050	50
75mm	QB75C-S	QB75M-S	QB75F-S	QB75VF-S		20,000	QS075	25
100mm	QB100C-S	QB100M-S	QB100F-S	QB100VF-S		12,000	QS100	25

ideal for

For use on all metals

Ideal for removing small surface defects, removing handling marks, removal of light oxidation and cleaning

garryflex® is a registered trademark of Garryson Ltd

